



BF Rated

Output

4" x 2" x 1.61"

Small

Fan-less

Silent



Fan-less conduction cooled 300W scalable power

The VCCS300 Conduction Cooled Power Series delivers a silent 300 Watts of continuous output power in a rugged and miniature 4" x 2" x 1.61" package. It is the ultimate power solution for Class I & II applications where rugged reliability, high efficiency, silent operation, and medical BF-rating are important factors. Power solutions of 300W, 600W, 900W and beyond can be achieved by using the onboard droop current share function, which allows end users to scale up their power requirements or add redundancy depending on their system needs. The VCCS300 series offers standard output voltages of 12, 15, 24, 28, 36, 48 and 56VDC. Non-standard and value-add solutions are also available which allows customers to choose any output voltage from 12V to 58V, saving system designers valuable time and cost. The power series is BF-rated, feature Class I & II isolation and are approved to medical equipment standards including IEC/UL60601-1 Edition 3.2 and IEC/UL60601-1-2 Edition 4 (EMC). The VCCS300 series achieves very high efficiencies up to 95%, best-in-class EMC performance, low no-load power consumption and come with a standard 5-year warranty.



MAIN FEATURES & BENEFITS

- Powerful 300 Watt ($V_{in} > 120V_{RMS}$)
- Small 4" x 2" x 1.61", exceeding 23W/in³
- Fan-less conduction cooled & silent operation
- Scalable power architecture
- Parallel units with droop current sharing
- Standard outputs 12, 15, 24, 28, 36, 48, 56V_{DC}
- Fully safety approved & value-add solutions from 12 to 58V_{DC} on request.
- Approved to latest safety standards: IEC/UL60601-3.2 Ed & IEC/UL60601-1-2 4th Ed (EMC)
- High efficiency – up to 95%
- High reliability
- Class I or II installations
- Operating altitude up to 5000m
- Low leakage & touch current
- Low no-load power consumption
- BF rated output
- Best-in-class EMC performance
- 24-hour samples from distribution
- Supplier & technology consolidation
- SEMI F47 compliant
- MIL-STD 810G, MIL-STD 461F & MIL-STD 704F
- Expert technical support
- 5 year warranty

APPLICATIONS



- Ventilators
- Respirators
- Laboratory & Analysis
- Dental Equipment
- Mobile Applications
- Medical Displays
- Medical Lighting
- Medical Lasers
- Infusion pumps
- Endoscopes
- Home Healthcare



MODEL SELECTION

| Model Number | Nominal Output Voltage (V _{DC}) | Maximum Rated Output Current (A) | Maximum Rated Power (W) ⁽²⁾ |
|--------------|---|----------------------------------|--|
| VCCS300M-12 | 12 | 25 | 300 |
| VCCS300M-15 | 15 | 20 | 300 |
| VCCS300M-24 | 24 | 12.5 | 300 |
| VCCS300M-28 | 28 | 10.71 | 300 |
| VCCS300M-36 | 36 | 8.33 | 300 |
| VCCS300M-48 | 48 | 6.25 | 300 |
| VCCS300M-56 | 56 | 5.35 | 300 |

Notes

1. Input voltage range for all models is 85V_{AC} to 264V_{AC}.
2. De-rate linearly from 300Watts at 120V_{RMS} to 212.5Watts at 85V_{RMS}.
3. Contact Vox Power for voltages not listed above.

SPECIFICATIONS

All specifications are measured @ T_A=T_{BASE}= 25°C, rated input & rated load unless otherwise stated)

| SPECIFICATIONS | | | | | |
|-------------------------------|--|-------|---------|----------|-----------------------|
| Parameter | Details | Min | Typical | Max | Units |
| AC Input Voltage | Nominal range is 100V _{RMS} to 240V _{RMS} . | 85 | | 264 | V _{RMS} |
| AC Input Frequency | Contact factory for 400Hz operation. | 47 | 50/60 | 63 | Hz |
| DC Input Voltage | Not covered by safety approvals. Contact Vox Power. | 120 | | 370 | V _{DC} |
| Input Current | 300Watts output at 120 V _{RMS} input. | | | 3 | Amps |
| Input Current Limit | | | 5 | | Amps |
| Inrush Current | 265V _{RMS} , 25°C (cold start). | | | 20 | Amps |
| Fusing | Each line fused (5x20 Fast acting, 1500A breaking capacity). | | | 5 | Amps |
| Efficiency | See graphs. | | | 95 | % |
| Power Factor | | | 0.99 | | |
| Holdup | 300Watts output at 120V _{RMS} input. | 14 | 16 | | mS |
| No load Power consumption | 220V _{RMS} . | | 0.8 | 1 | Watts |
| Output Power Rating | De-rate linearly from 300Watts at 120V _{RMS} to 212.5 Watts at 85V _{RMS} . | | | 300 | Watts |
| Output Voltage | All Models. Initial Setting, -25°C to 125°C | -1 | | 1 | %V _O |
| Load Regulation | All Models. | -50 | | 50 | mV |
| Line Regulation | All Models. | -0.1 | | 0.1 | %V _O |
| Ripple & Noise ⁽²⁾ | 12V Model. 20MHz BW, V _{PKPK} . All Other Models. 20MHz BW, V _{PKPK} . | | | 1.5 1 | %V _O |
| Minimum Load | All Models. | | | 0 | Watts |
| Transient Response | 25% to 75% I _{RATED} , 1 A/uS. Recovery to within 10% of V _O . | | | 6 500 | %V _O uS |
| Turn on Rise Time | All Models. 10% to 67% of V _O . | | 2 | | mS |
| Turn on Delay | All Models, All Vin, All loads. | | 800 | | mS |
| Current Share | All Models. Droop mode, Vmax @0% load, Vmin @100% Load. | -2.5% | | +2.5% | %V _O |
| Temperature Coefficient | All Models. | -0.02 | | 0.02 | %V _O /°C |
| Over Current Protection | All Models. Constant current mode. | 105 | 115 | 125 | %I _{RATED} |
| Short Circuit Protection | All Models. Hiccup mode. Activation Threshold. | | | 80 | %V _O |
| Over Voltage Protection | All Models. Auto Restart. | | | 125 | %V _O |
| Over Temperature Protection | All Models. Auto Restart. | 105 | | 125 | °C |
| Reliability ⁽¹⁾ | All Models. | | 1.1 | | FPMH |
| Warranty | Standard terms and conditions apply. | | | 5 | Years |
| Size | 101.3 (L) x 50.8 (W) x 40.2 (H). See diagram for tolerance details | | | | mm |
| Weight | 310 | | | | Grams |

Notes

1. 30°C base & ambient, 100% load, SR332 Issue 2 Method I, Case 3, Ground, Fixed, Controlled
To ensure reliability, component temperatures must be maintained below recommended levels in the end application.
The "System cooling" section of the user manual should be reviewed in detail and temperatures verified in the end application.
2. Up to 3% in burst mode with no external capacitance.

| SAFETY SPECIFICATIONS | | | | | |
|--|--|---------|-----------|-----------------|-------|
| Parameter | Details | Typical | Max | Units | Notes |
| Isolation Voltages | Input to Output (2 MOPP) ⁽¹⁾ | | 4000 | V _{AC} | |
| | Input to Chassis (1 MOPP) | | 2000 | V _{AC} | |
| | Output to Chassis (1 MOPP) | | 1500 | V _{AC} | |
| Earth Leakage Current | NC/SFC (Class I), 264Vac, 63Hz, 25°C | 186/337 | <300/<400 | µA | |
| Touch Leakage Current (Enclosure to Earth) | NC (Class I/Class II), 264Vac, 63Hz, 25°C | 0/186 | <20/<300 | µA | |
| | SFC (Class I/Class II), 264Vac, 63Hz, 25°C | 186/337 | <300/<500 | µA | |
| Patient Leakage Current (Output to Earth) | NC (Class I/Class II), 264Vac, 63Hz, 25°C | 33/77 | <100/<100 | µA | |
| | SFC (Class I/Class II), 264Vac, 63Hz, 25°C | 77/150 | <100/<200 | µA | |

Notes

1. Use DC equivalent voltage to test assembled unit.
2. NC = Normal Condition, SFC = Single Fault condition
3. Leakage currents will sum for paralleled units. N units will have N times the leakage current.

| INSTALLATION SPECIFICATIONS | | | |
|-----------------------------|------------------------|----------------------------|-------------------------------------|
| Parameter | Details | Parameter | Details |
| Equipment class | I or II ⁽¹⁾ | Flammability Rating | 94V-2 |
| Overvoltage category | II | Ingress protection rating | IP10 |
| Material Group | IIIb (indoor use only) | Intended usage environment | Home Healthcare (M)/ Industrial (S) |
| Pollution degree | 2 | | |

1. Conditions of acceptability may apply. See UL report.

ENVIRONMENTAL

| Parameter | Details | Non-Operational | | Operational | | Units |
|-----------------|---|-----------------|------------|--------------------|---------------------|-----------------------------|
| | | Min | Max | Min | Max | |
| Air Temperature | Operational limits subject to appropriate de-ratings | -51 | +85 | -40 ⁽¹⁾ | 70 | °C |
| Humidity | Relative, non-condensing | 5 | 95 | 5 | 95 | % |
| Altitude | | -200 | 5000 | -200 | 5000 ⁽²⁾ | m |
| Shock | IEC60068-2-27: Half sine, 3 axes, 3 positive & 3 negative. | | 50, 11 | | 30, 18 | g, mS |
| Vibration | IEC60068-2-6: Sine, 10 – 500 Hz, 3 axes, 1 oct/min., 10 cycles each axis IEC60068-2-64: Random, 5 – 500 Hz, 3 axes, 30 min. MIL-STD-810G: Method 514.6, Procedure I (General Vibration) Category 4 (Trucks & Trailers, Composite wheeled vehicle), Figure 514.6C-3. Category 7 (Aircraft, Jet cargo), Figure 514.6C-5 General exposure Category 24, (All, Minimum integrity) Figure 514.6E-1 | | 0.02, 2.56 | | 2 0.01, 22, 1 | g g/Hz, g _{RMS} |
| Thermal shock | MIL-STD-810G: Method 503.5 Procedure I-C. Multi-cycle. 3 shocks. | -51 | 85 | | | °C |
| Notes | 1. Some specifications may not be met below -20°C. 2. Additional power derating may be necessary at high altitudes to ensure component temperatures remain within specification. | | | | | |

ELECTROMAGNETIC COMPLIANCE – EMISSIONS

| Phenomenon | Basic EMC Standard | Test Details |
|---|--------------------------------------|---------------------------------------|
| Radiated emissions, electric field | EN55011/32 | Class B compliant |
| Conducted emissions | EN55011/32, FCC part 15, CISPR 32/11 | Class B compliant |
| Harmonic Distortion | IEC61000-3-2 | Compliant |
| Flicker & Fluctuation | IEC61000-3-3 | Compliant |
| Radiated emissions, electric field, 30Hz-18GHz. | MIL-STD-461F: RE102 (Ground, Fixed) | Compliant (When mounted in enclosure) |
| Conducted emissions, power leads, 10kHz-10MHz. | MIL-STD-461F: CE102 | Compliant |

ELECTROMAGNETIC COMPLIANCE – IMMUNITY

| Phenomenon | Basic EMC Standard | Test Details |
|--|---|--|
| Electrostatic discharge | IEC61000-4-2 | Test level 4: 15kV air, 8kV contact |
| Radiated RF EM fields | IEC61000-4-3 | Test Level 3: (10V/m, 80MHz-2.7GHz) sine wave AM 80% 1kHz |
| Proximity fields from RF wireless communications equipment | IEC61000-4-3 | Test levels as per IEC60601-1-2:2014 Table 9 |
| Electrical Fast Transients/bursts | IEC61000-4-4 | Test Level 3: (2kV Power, 1kV I/O) 5kHz(ed3) & 100kHz(ed4) |
| Surges | IEC61000-4-5 | Test Level 3: 1kV L-N, 2kV L-E |
| Conducted disturbances induced by RF fields | IEC61000-4-6 | Test Level 3: 10V, 0.15 to 80MHz sine wave AM 80% 1kHz |
| Power Frequency Magnetic Fields | IEC61000-4-8 | Test level 4: 30A/m 50Hz |
| Voltage Dips | IEC61000-4-11 ⁽²⁾ | 0% 10ms (Criterion A) 0% 20ms (Criterion B ⁽³⁾) 70% 0.5s, 40% 0.2s (Criterion A at 240V and Criterion B at 100V) |
| Voltage interruptions | IEC61000-4-11 | 0% 250/300 cycle as per IEC60601-1-2:2014 (Criterion B) |
| Voltage Sag Immunity | SEMI-F47-0706 ⁽²⁾ | 0% 20mS (Criterion B ⁽³⁾) 80% 1s, 80% 10s, 90% continuous (Criterion A) 70% 0.5s, 50% 0.2s (Criterion A at 240V and Criterion B at 100V ⁽⁴⁾) |
| Shipboard Electric Power. Voltage Spike Test | MIL-STD-1399, SECTION 300A | Type 1, 115V 60Hz single phase |
| Conducted susceptibility, power leads | MIL-STD-461F: CS101 | 30Hz-150kHz |
| Conducted susceptibility, Bulk cable injection | MIL-STD-461F: CS114 | 10kHz-200MHz |
| Conducted susceptibility, Bulk cable injection, impulse excitation | MIL-STD-461F: CS115 | |
| Conducted susceptibility, damped sinusoidal transients, cables and power leads | MIL-STD-461F: CS116 | 10kHz-100MHz |
| Radiated susceptibility, Magnetic field | MIL-STD-461F: RS101 | 30Hz-100kHz |
| Radiated susceptibility, electric field | MIL-STD-461F: RS103 | 2 MHz to 40 GHz, 20V |
| Aircraft Electric Power Characteristic | MIL-STD-704F | SAC102,104,105,109,110 (MIL-HDBK-704-2) & SXF102,104,105,109,110 (MIL-HDBK-704-6) |
| Notes: | 1. Criterion A = No degradation of performance or loss of function. Criterion B = Temporary degradation of performance or loss of function is allowed, provided the function is self-recoverable. Criterion C = Temporary loss of function is allowed but requires operator intervention to recover. 2. Tested at nominal range (100V to 240V). Line deratings applied where appropriate. 3. Criterion A is achieved for all input voltages when Pout <= 280W 4. Criterion A is achieved for full power when Vin >=160V or at all input voltages when Pout <= 200W | |


AGENCY APPROVALS

| Standard | Details | File |
|---|---|-------------|
| IEC 60601-1:2005, COR1:2006, COR2:2007, AMD1:2012 | Edition 3.1 - Medical electrical equipment— Part 1: General requirements for basic safety and essential performance | |
| ANSI/AAMI ES60601-1: A1:2012, C1:2009/(R)2012 & A2:2010/(R)2012 | Medical electrical equipment— Part 1: General requirements for basic safety and essential performance | UL: E316486 |
| CAN/CSA-C22.2 No. 60601-1:14 | Medical electrical equipment— Part 1: General requirements for basic safety and essential performance | |
| CE MARK | LVD 2014/35/EU, EMC 2014/30/EU, RoHS 2011/65/EU | |
| UKCA | Safety S.I. 2016:1101, EMC S.I. 2016:1091, RoHS S.I. 2012:3032 | |

POWER RATINGS
Mains Voltage Derating ⁽⁸⁾


| Mains Voltage Derating Table | | |
|-----------------------------------|--------------|-------|
| Mains Voltage (V _{RMS}) | Output Power | (%) |
| 120 | 300 | 100% |
| 110 | 275 | 91.7% |
| 100 | 250 | 83.3% |
| 90 | 225 | 75.0% |
| 85 | 212.5 | 70.8% |

The output power must be de-rated by 2.5% for every 3 volts below 120V_{RMS}, down to a minimum of 85V_{RMS}.

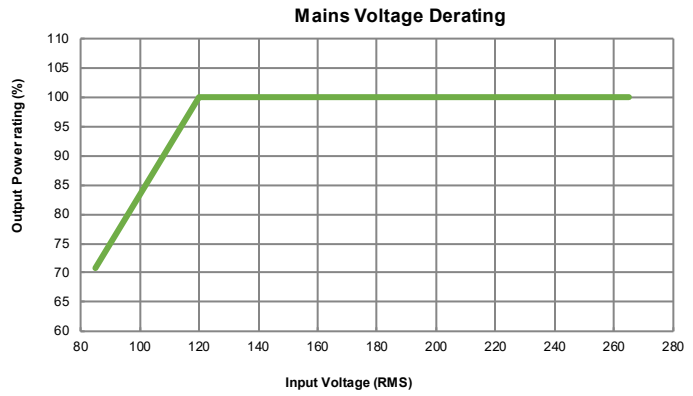

Typical Thermal Performance ⁽⁷⁾

| Typical Convection Cooled Performance. VIN = 120VAC | | | | | | |
|---|-----|-----|-----|-----|----|--|
| Ambient (°C) | 0 | 20 | 30 | 50 | 70 | |
| 12V | 300 | 240 | 210 | 141 | 54 | |
| 15V | 300 | 300 | 268 | 172 | 54 | |
| 24V | 300 | 294 | 264 | 186 | 54 | |
| 28V | 300 | 300 | 272 | 159 | 54 | |
| 36V | 300 | 300 | 286 | 193 | 54 | |
| 48V | 300 | 300 | 286 | 196 | 54 | |
| 56V | 300 | 300 | 292 | 199 | 54 | |

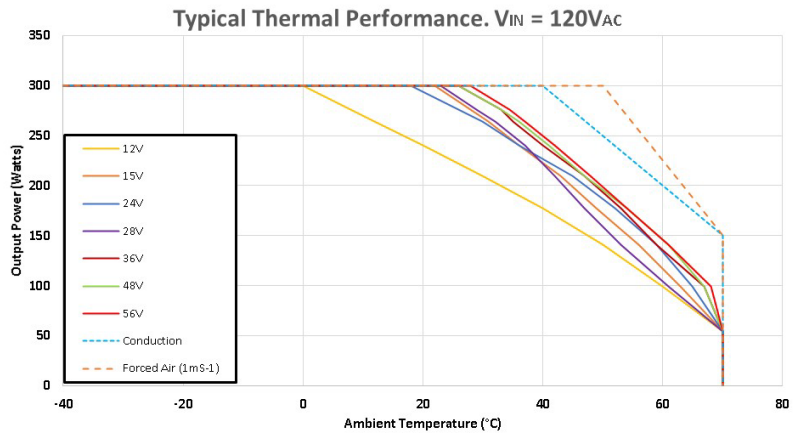


Notes:

- Ambient air temperature is the air temperature immediately surrounding the PSU. If the PSU is mounted within an enclosure, the internal enclosure ambient temperature should be used.
- Typical convection cooled performance is measured under controlled conditions in a sealed chamber of approximately 0.5mx0.3mx0.5m with the unit positioned in the centre of the volume.
- The profiles shown ensure all components remain within their IPC9592B deratings.
- Operation of components above the recommended temperatures will result in reduced lifetime of the unit and invalidate the warranty.
- The conduction cooled rating for all models applies under the following conditions: Baseplate temperature ⁽²⁾ ≤ T_{AMBIENT} + 15°C
- The forced air rating for all models applies for airflow ≥ 1m/s¹ (200LFM). See *Mechanical Dimensions and Mounting* section for Airflow direction.
- See user manual for further details of ratings and safety certifications.


Mains Voltage deratings are cumulative with thermal deratings.

TYPICAL EFFICIENCIES

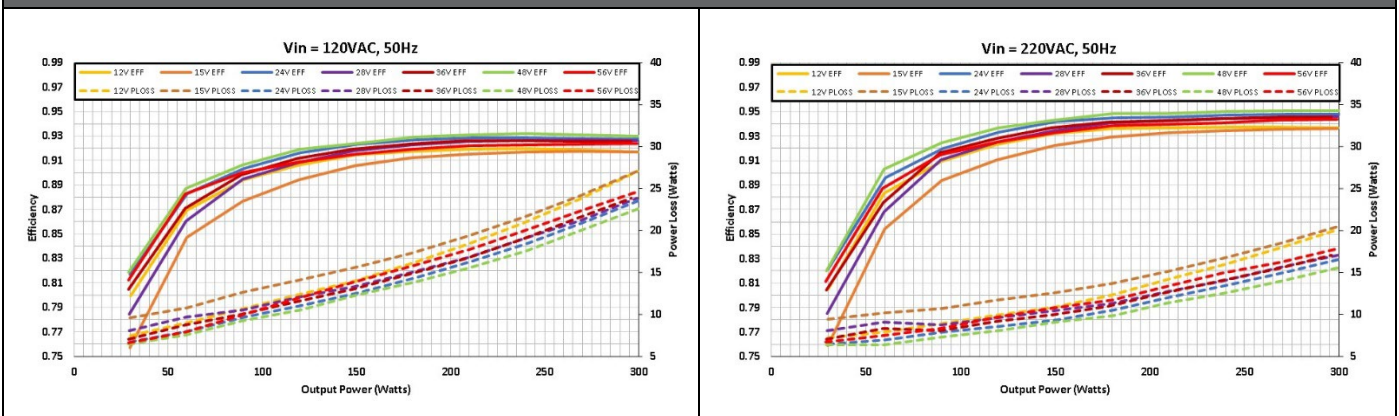

MECHANICAL DIMENSIONS AND MOUNTING
SCREWS


| Location | Details | Penetration | Tightening |
|--|------------------------------|-------------------------------------|------------|
| Baseplate Mount (Screw from top side): N1 – N4 ⁽¹⁾ | M3 Hex Socket Head Cap Screw | 3mm Head height | 0.50NM |
| Baseplate Mount (Screw from bottom side): N1 – N4 | M4 - Customer Preference | 6mm from bottom of Baseplate | 0.55NM |
| Output Terminal | M4 SEM POZI | M4 SEM screw, 8mm max length | 0.55NM |

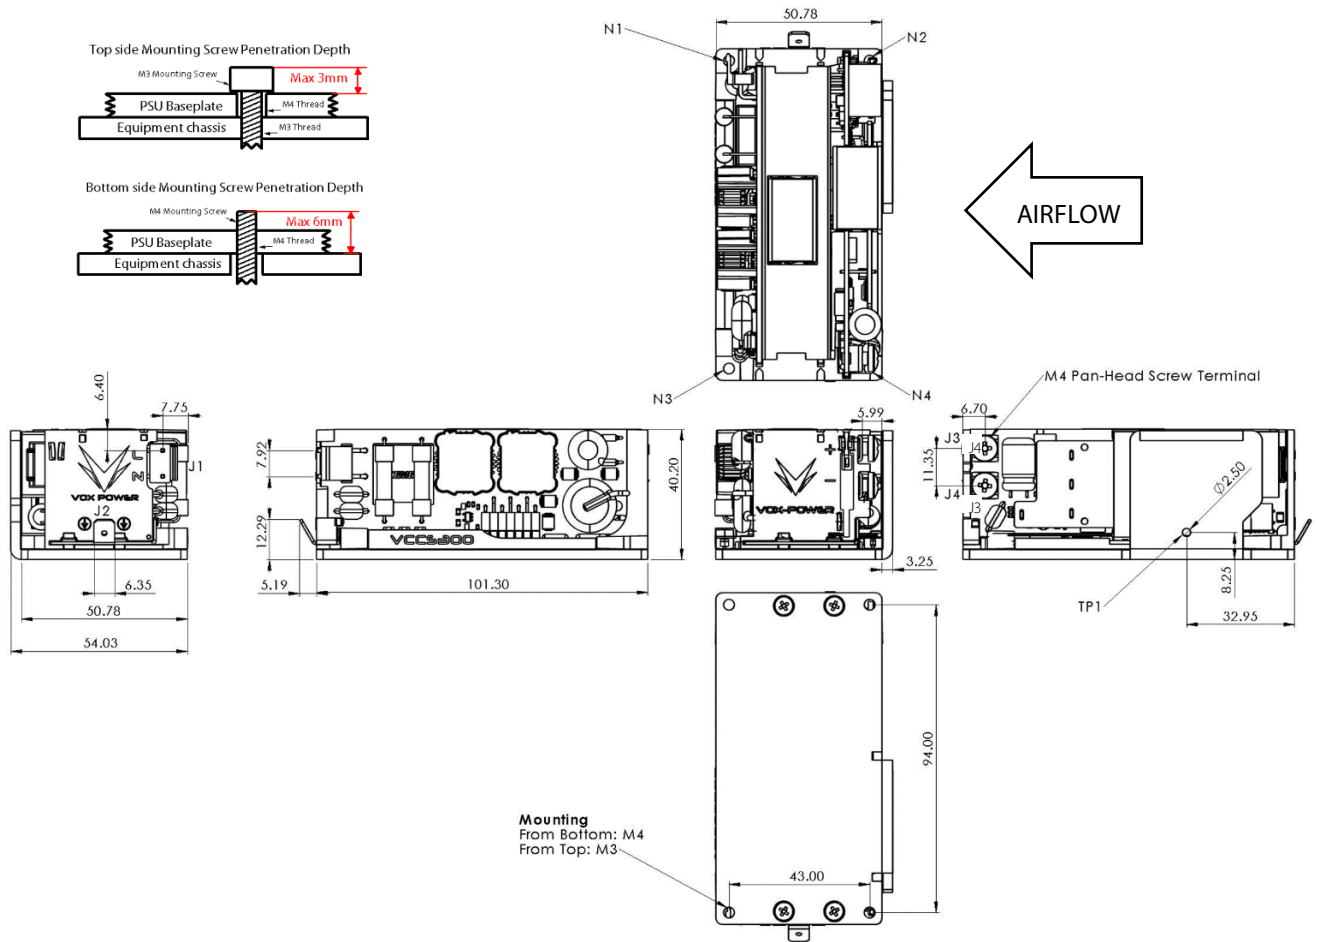

Notes

- Top Side mounting screws are obstructed by components in some areas. M3 Hex socket screws should be used to allow angled access for tightening with a 2.5mm hex ball screwdriver. Care should be taken to ensure components are not damaged while tightening.

CONNECTOR DETAILS

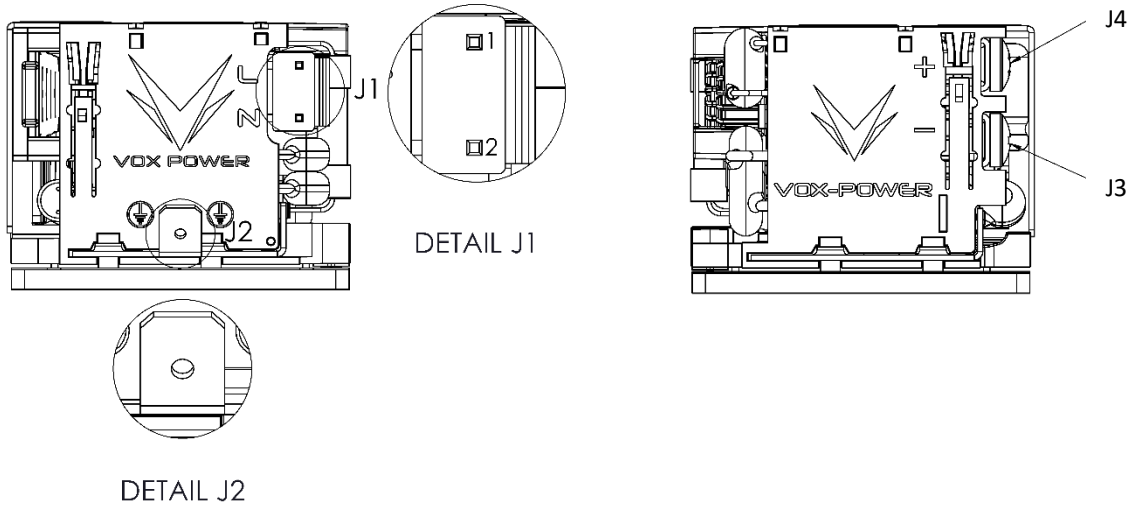


MATING CONNECTORS

| Ref. | Details | Manufacturer | Housing | Terminal |
|--|---|-----------------|---------|--------------|
| J1 - Mains Input Cct. 1 - Live, Cct. 2 - Neutral | 2 Pin, 7A, 250V _{AC} , 7.92mm Locking ⁽¹⁾ | JST | VAR-2 | SVA-41T-P1.1 |
| J2 - Protective Earth | FASTON, PIDG series, Positive lock 0.25EX | TE Connectivity | - | 165536-1 |
| J4 - Positive Output Power J3 - Negative Output Power | M4 terminal, 0.55Nm | KST | - | SNB55-4 |

Notes

1. Cable 18-20AWG, 300V, >7A, 105°C.
2. Direct equivalents may be used for any connector parts.
3. All cables must be rated 105°C min, equivalent to UL1015

PART NUMBERING SYSTEM

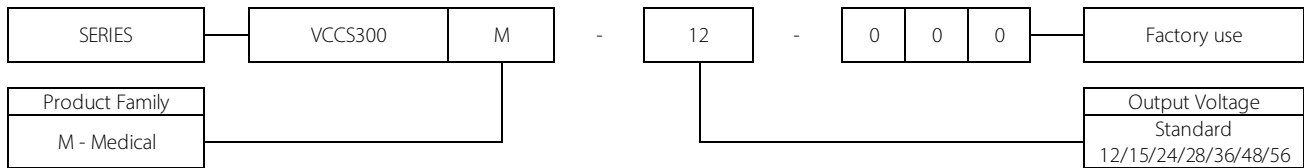

Contact your Distributor or Vox Power representative for information regarding non-standard output voltage requirements

All specifications are believed to be correct at time of publishing. Vox Power Ltd reserves the right to make changes to any of its products and to change or improve any part of the specification, electrical or mechanical design or manufacturing process without notice. Vox Power Ltd does not assume any liability arising out of the use or application of any of its products and of any information to the maximum extent permitted by law. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any products of Vox Power Ltd. VOX POWER LTD DISCLAIMS ALL WARRANTIES AND REPRESENTATIONS OF ANY KIND WHETHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, IMPLIED WARRANTIES OF SUITABILITY, FITNESS FOR PURPOSE, MERCHANTABILITY AND NON-INFRINGEMENT. Please consult your local distributor or Vox Power directly to ensure that you have the latest revision before using the product and refer to the latest relevant user manual for further information relating to the use of the product. Unless specifically otherwise agreed in writing by Vox Power, products sold by Vox Power are not intended for use in connection with life support systems, human implantations, nuclear facilities or systems, aircraft spacecraft, military or naval missile, ground support or control equipment used for the purpose of guidance navigation or direction of any aircraft spacecraft or military or naval missile or any other application where product failure could lead to loss of life or catastrophic property damage. The user will indemnify and hold Vox Power harmless from any loss, cost or damage resulting from its breach of the provisions.