

DDP520 SERIES

MAIN FEATURES

- Universal input voltage range (90 – 305 V_{AC})
- Input surge current limiting (< 20 A)
- 340 W at natural convection, 460 W forced air cooling, 520 W temporary (10 s)
- Open frame, 3 x 5" industrial standard footprint
- High efficiency up to 94.5%
- 24, 48 and 56 V_{DC} standard output voltages
- Low stand-by consumption (<0.35 W)
- Active PFC, EN61000-3-2 compliant (Class C, >20% load)
- Low earth / touch leakage current (<250 / 100 µA)
- Over temperature, OV, OC and SC protections.
- Stand by +5 V, 1 A output.
- Remote On / Off signal
- Power good and remote sense signals
- Audio/Video IT IEC/EN/UL 62368-1 3rd edition certified.
- RoHS 3 compliant (Directive EU 2015/863)
- High altitude operation compatible up to 5000 m
- Protective cage option available



DESCRIPTION

The DDP520 series of ITE / Industrial grade AC-DC power supplies provide the compact form factor and high efficiency that the marketplace demands.

The series can provide 460 W of regulated DC power and 520 W peak operating over 90 to 305 V_{AC} input voltage range, in a 3.0 x 5.0 x 1.51" form factor. The DDP520 series comes in an open frame compact package to facilitate system integration and thermal management in space constraint and closed environments, thanks also to its 94% high efficiency which generate less heat.

The series comes in 24, 48 and 56 V_{DC} standard output voltages with additional 12, or 36 V_{DC} output voltages variants which will be available upon business case evaluation. It offers a +5 V_{DC} stand-by output capable of 1 A. Available control signals include Power Good (P_OK), Remote On / Off (PS_Inhibit) and Sense terminals (RS⁺).

The series can be operated over the -40 to 70 °C ambient temperature range with output power derating factor applied above 50 °C and below -20 °C start up.

Protection features include slow blow fuses on both AC lines, input under voltage lockout (IUV), output over-current (OC), output short-circuit (SC), output over-voltage (OV) and over-temperature (OT).

The DDP520 Free Air series complies with the 3rd edition of the IEC 62368-1 for audio / video and information technology equipment.

The DDP520 Free Air series meets the EN 55032 limits of Class B for conducted and radiated emissions as well as the IEC/EN61000-3 for flicker and harmonics content. It also meets the EN 55024 for EMC immunity.

MARKET SEGMENTS AND APPLICATIONS


- | | |
|--|----------------------------------|
| • LED Video Wall Displays and SSL Lighting Equipment | • Test and Measurement Equipment |
| • Industrial Process Control and Automation | • Air / Water treatment System |
| • Telecommunication Apparatus | • ATM / Vending Machine |
| • Laboratory / Analysis Equipment | • Household Appliances |

MODEL CODING AND OUTPUT RATINGS

Model Code	V _{OUT} Nominal [V _{DC}]	V _{AC} Range [V]	I _{OUT} [A]	I _{SB} [A]	Cooling Mode	Max Combined Output Power [W]
DDP520-US12-OF	12	≥90	TBD	1.0	Natural Convection	TBD
		≥100	TBD	1.0		TBD
		≥180	TBD	1.0		TBD
		90-305	TBD	1.0	> 600 LFM forced air	TBD
DDP520-US12-PC	12	≥90	TBD	1.0	Natural Convection	TBD
		≥100	TBD	1.0		TBD
		≥180	TBD	1.0		TBD
		90-305	TBD	1.0	> 600 LFM forced air	TBD
DDP520-US24-OF	24	≥90	14.1	1.0	Natural Convection	340
		≥100	15	1.0		360
		≥180	17.3	1.0		415
		90-305	19.2	1.0	> 600 LFM forced air	460
DDP520-US24-PC	24	≥90	14.1	1.0	Natural Convection	310
		≥100	15	1.0		340
		≥180	17.3	1.0		390
		90-305	19.2	1.0	> 600 LFM forced air	460
DDP520-US36-OF	36	≥90	TBD	1.0	Natural Convection	TBD
		≥100	TBD	1.0		TBD
		≥180	TBD	1.0		TBD
		90-305	TBD	1.0	> 600 LFM forced air	TBD
DDP520-US36-PC	36	≥90	TBD	1.0	Natural Convection	TBD
		≥100	TBD	1.0		TBD
		≥180	TBD	1.0		TBD
		90-305	TBD	1.0	> 600 LFM forced air	TBD
DDP520-US48-OF	48	≥90	7.1	1.0	Natural convection	340
		≥100	7.5	1.0		360
		≥180	9.6	1.0		460
		90-305	9.6	1.0	>600 LFM forced air	460
DDP520-US48-PC	48	≥90	7.1	1.0	Natural convection	310
		≥100	7.5	1.0		340
		≥180	9.6	1.0		390
		90-305	9.6	1.0	>600 LFM forced air	460
DDP520-US56-OF	56	≥90	6.25	1.0	Natural convection	350
		≥100	6.6	1.0		370
		≥180	8.2	1.0		460
		90-305	8.2	1.0	>600 LFM forced air	460
DDP520-US56-PC	56	≥90	6.25	1.0	Natural convection	310
		≥100	6.6	1.0		340
		≥180	8.2	1.0		390
		90-305	8.2	1.0	>600 LFM forced air	460


OUTPUT POWER DERATING CURVES

DDP520 SERIES

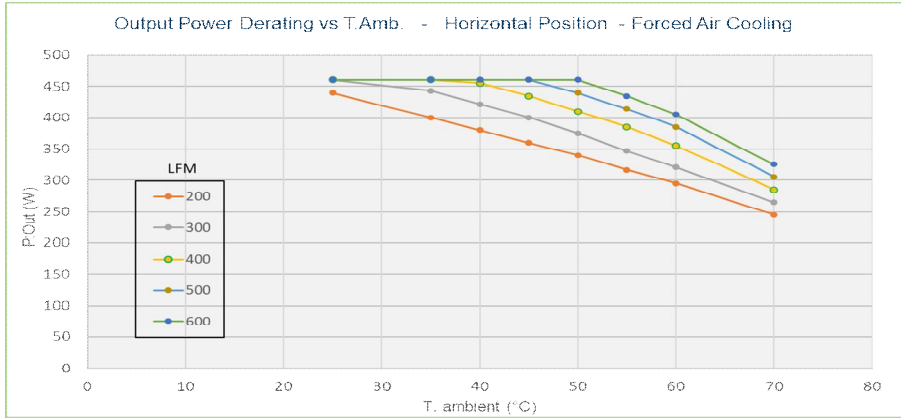


V_{OUT}: 24 V_{DC}

V_{IN}: ≥90V_{AC}

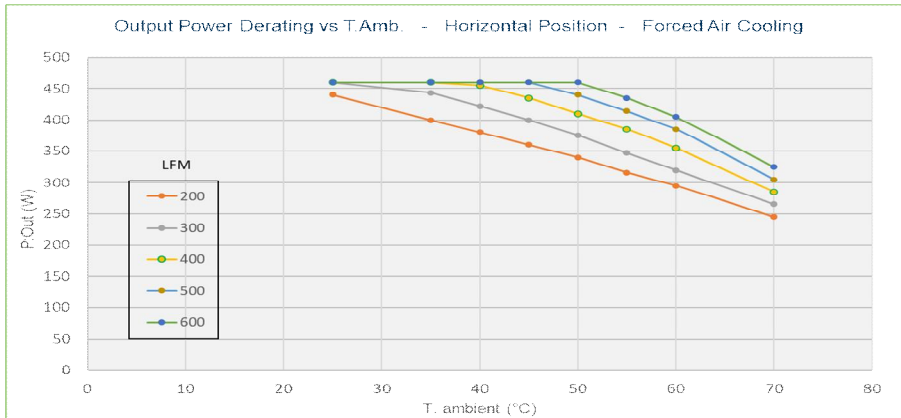


V_{OUT}: 48, 56 V_{DC}

V_{IN}: ≥90V_{AC}

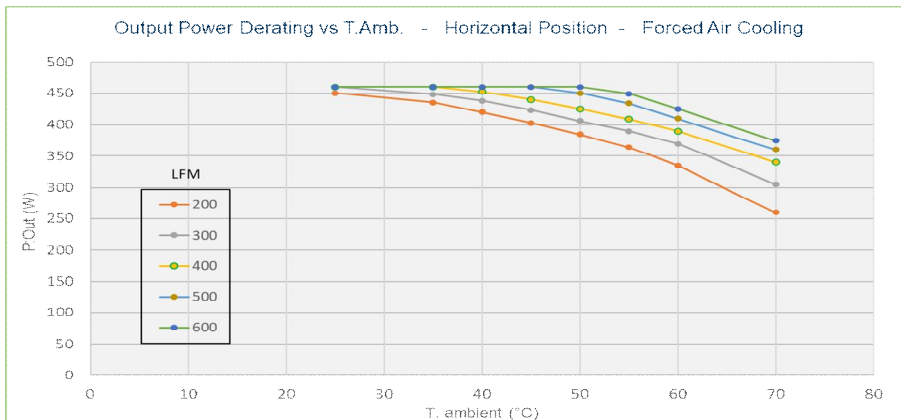


V_{OUT}: 24 V_{DC}

V_{IN}: ≥115V_{AC}

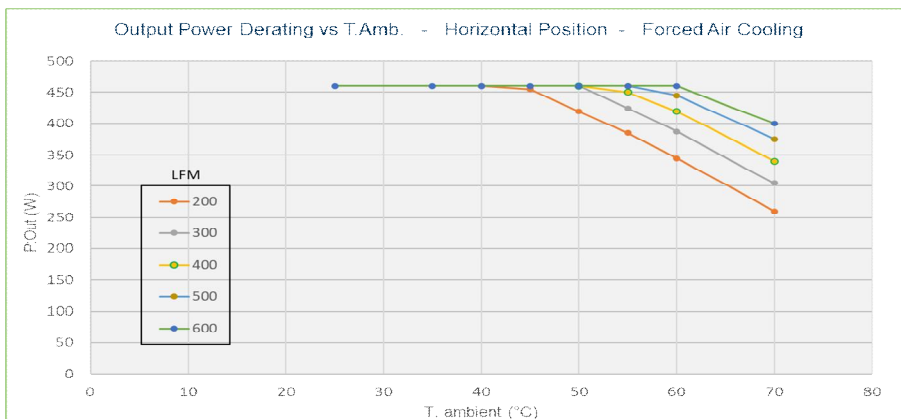


V_{OUT}: 48, 56 V_{DC}

V_{IN}: ≥115V_{AC}




V_{OUT}: 24 V_{DC}

DDP520 SERIES


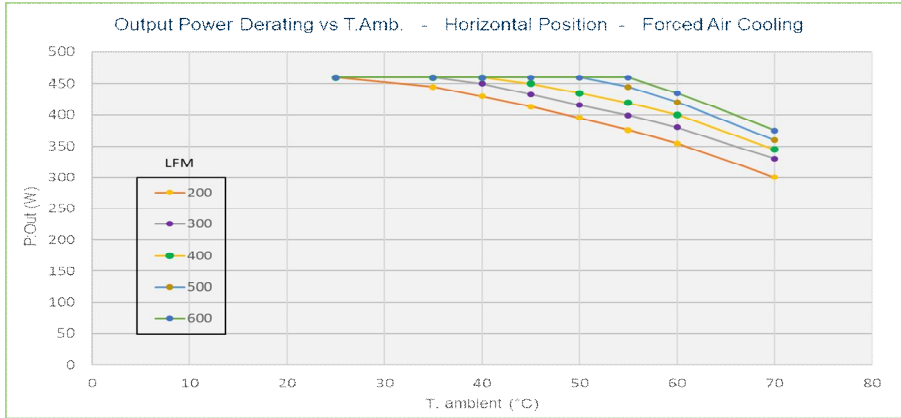


$V_{IN} \geq 180V_{AC}$


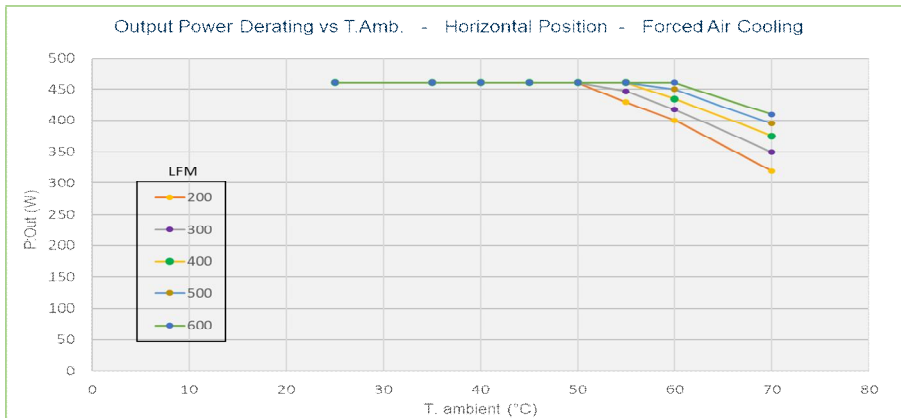


$V_{OUT}: 48, 56 V_{DC}$


$V_{IN} \geq 180V_{AC}$

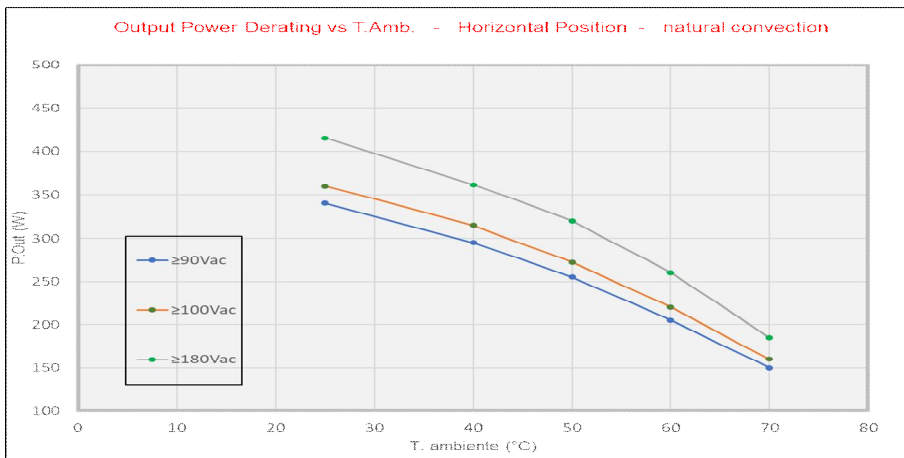


$V_{OUT}: 24 V_{DC}$

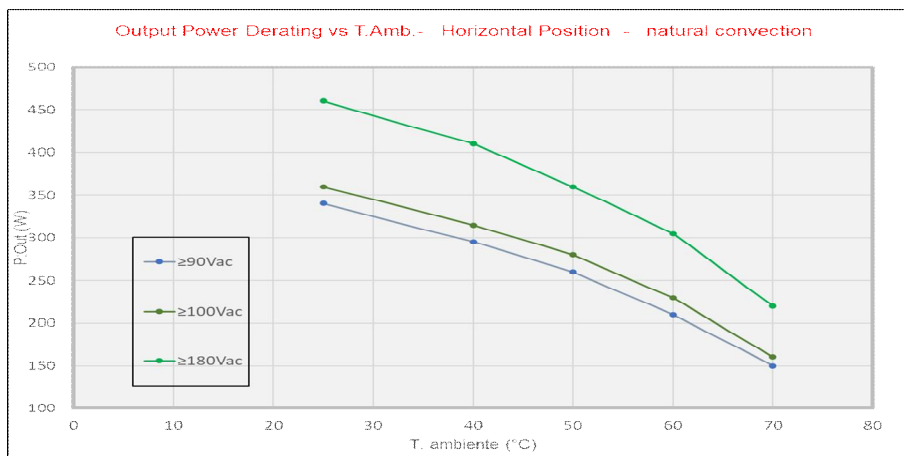



$V_{OUT}: 48 V_{DC}$



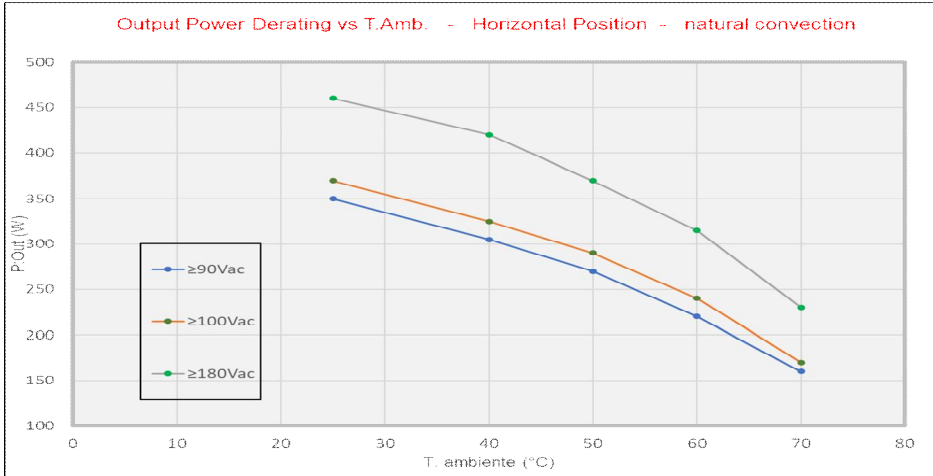





$V_{OUT}: 56 V_{DC}$

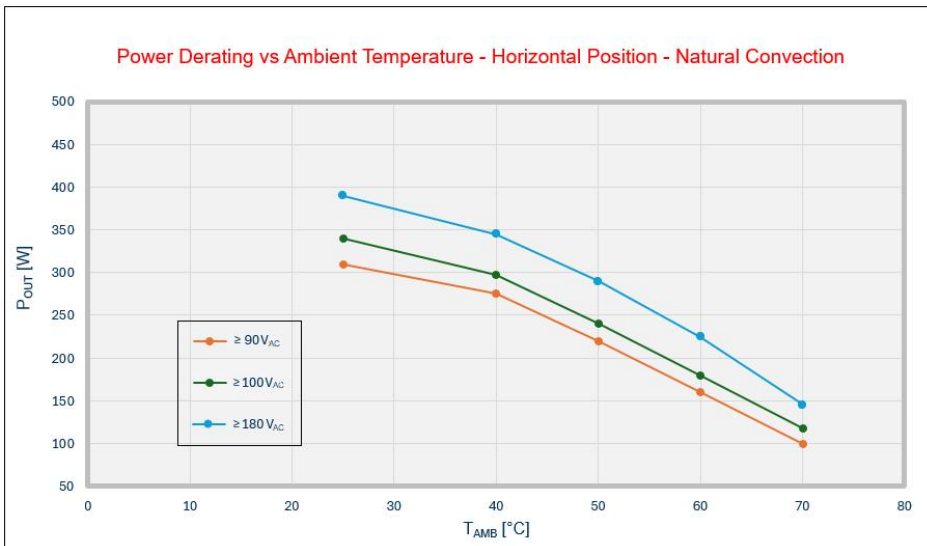

$V_{OUT}: 24, 48, 56 V_{DC}$



DDP520 SERIES

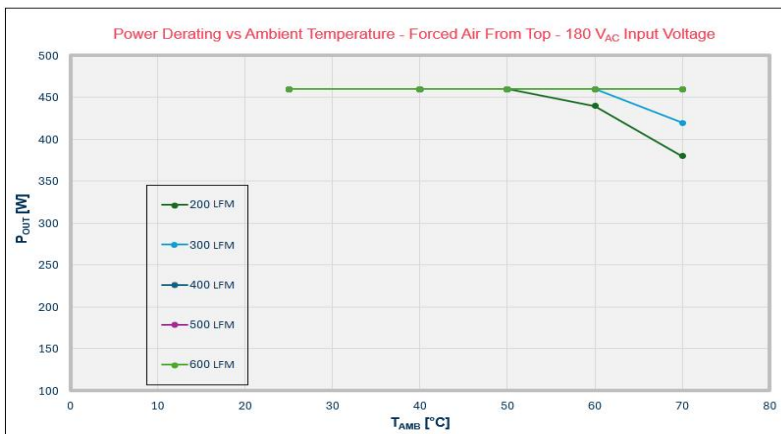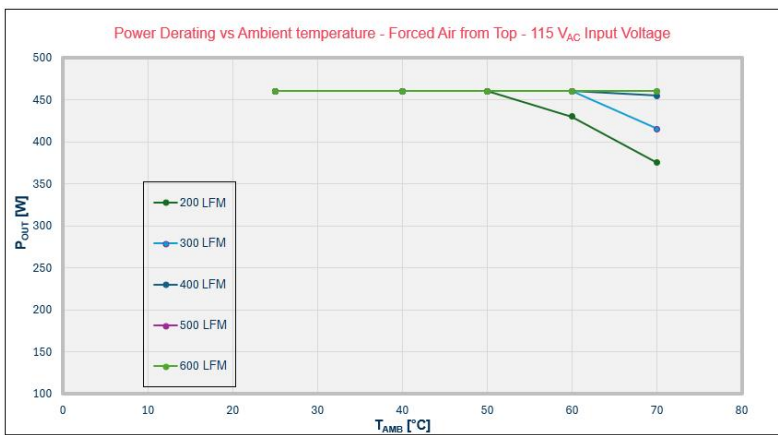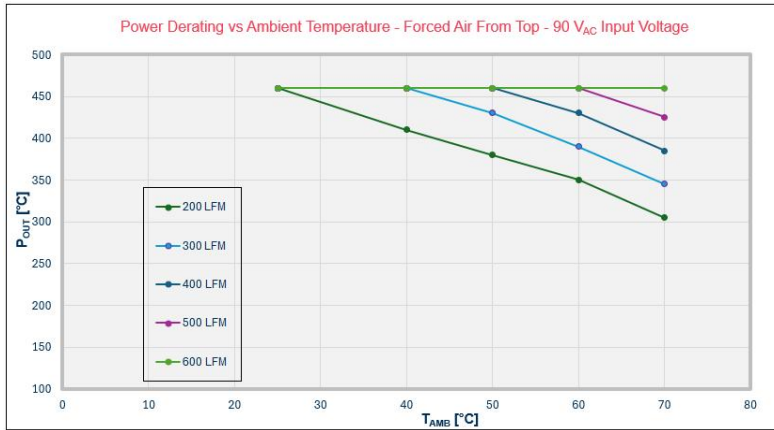

V_{OUT}: 24, 48, 56 V_{DC}

The above curves come from a climatic static chamber and a specific set up therefore they represent a thermal performance approximation of a DDP520 installed into a system where not all the variables can be controlled. Although they are a reasonable reference, it is always a recommended practice to monitor the power supply critical components temperature when operating into a system (see below hot-spots thermal map).


INPUT SPECIFICATIONS

Specification	Test Conditions / Notes	Min.	Nominal	Max.	Units	
AC Input Voltage	PS starts and operates at 85 V _{AC} at all load conditions	90	100 ÷ 277	305	V _{RMS}	
Input Frequency		47	50/60	63	Hz	
Input Current	RMS at 180 V _{AC} , maximum load, 50 / 60 Hz RMS at 85 V _{AC} , maximum load, 50 / 60 Hz	-	-	3.5 7.0	A	
Inrush Current (peak)	Cold start, 25 °C ambient, full load	115 V _{AC}	-	-	10	A
		230 V _{AC}	-	-	20	
		277 V _{AC}	-	-	24	
Fusing	Slow blow, 8A, 250V on each AC lines.	-	-	8	A	
Efficiency	At 115 V _{AC} , 20% rated load 50% rated load 100% rated load	-	89	-	%	
		-	93	-		
		-	92	-		
	At 230 / 277 V _{AC} , 20% rated load 50% rated load 100% rated load	-	90	-		
		-	94	-		
		-	94.5	-		
Input Power Consumption	Power on, 115 V _{AC} , no load	-	-	4	W	
	Power on, 230 V _{AC} , no load	-	-	4		
	Stand by, 115, 230 V _{AC} , no load	-	-	0.35		
Power Factor	From 50 to 100% of rated load, 277, 230, 115 V _{AC} , 50 / 60 Hz input voltages.	0.90	-	-	-	
THDi	From 50 to 100% rated load, 115, 230, 277 V _{AC} 50 / 60 Hz.	-	-	20	%	
Harmonic Current Fluctuations and Flicker	Complies with EN 61000-3-2 at 230 V _{AC} , 50/60 Hz, Class A. Complies with EN 61000-3-2 Class C at 230 V _{AC} , 50/60 Hz, >150 W load. Complies with EN 61000-3-2 Class D at 230 V _{AC} , 50/60 Hz, >35 W load. Complies with EN 61000-3-3 at nominal voltages and full load.					
Earth Leakage Current	Normal conditions					
	115 V _{RMS} , 60 Hz	-	100	-	µA	
	230 V _{RMS} , 50 Hz	-	180	-		
	264 V _{RMS} , 60 Hz (worst case)	-	200	-		
277 V _{RMS} , 60 Hz	-	250	290			
Touch Leakage Current	264 V _{RMS} , 60 Hz					
	Normal Condition (NC) Single Fault Condition (SFC)	-	-	100 500	µA	
Patient Leakage Current	264 V _{RMS} , 60 Hz					
	Normal Condition (NC) Single Fault Condition (SFC)	-	-	100 500	µA	

OUTPUT SPECIFICATIONS

Specification	Test Conditions / Notes	Min.	Nom.	Max.	Units
V1 Output Voltages	±0.5% set point accuracy, 20% load		12 24 36 48 56	-	V
V1 Output Power Rating	Natural Convection (see graphs above) Forced air cooling (see graphs above) Peak power	-	-	460 460 520	W
5V _{SB} Output Voltage	±3% set point accuracy, 20% load	-	5	-	V
5V _{SB} Output Current		-	-	1.0	A
V1 Voltage Adjustment Range	Manually by potentiometer	-	-	±5	%V1
V1 Load-Line-Cross Regulation	V _{AC} : 85 – 305 V _{RMS} ; I1: 0 – 100%	-	-	±2	%V1
5V _{SB} Load-Line-Cross regulation	V _{AC} : 85 – 305 V _{RMS} ; I _{5SB} : 0 – 100%	-	-	±5	%5V _{SB}
V1 Line Regulation	V _{AC} : 85 – 305 V _{RMS}	-	-	±0.1	%V1
Transient Response: V1, 5V _{SB}	50% load changes at 1 A/μs 0.5 A load minimum load applied	-	-	±5	%V1 %5V _{SB}
Voltage Deviation					
V1 Ripple and Noise	Rated load, Peak-to-peak, 20 MHz BW. (100 nF ceramic, 10 μF tantalum at load)	-	-	1	%V1
V1 Start-up Rise Time	85<V _{IN} <305, any load conditions.	10	-	100	ms
Start-up Delay	V1 in regulation after de-asserting PS_ON	-	-	200	ms
	V1 in regulation after AC is applied (worst case: 85 V _{AC})	-	-	750	
	5V _{SB} in regulation after AC is applied (worst case: 85 V _{AC})	-	-	500	
Turn-on Overshoot		-	-	5	%V1
		-	-	5	%V _{SB}
V1 Hold-up Time	At nominal V _{IN} , full load	16	-	-	ms
Minimum Load	V1 and 5V _{SB}	0	-	-	A
Maximum Load Capacitance	V1: 12 V _{DC}	-	-	28000	μF
	V1: 24 V _{DC}	-	-	14000	
	V1: 36 V _{DC}	-	-	12000	
	V1: 48 V _{DC}	-	-	10000	
	V1: 54 V _{DC}	-	-	8000	

To ensure the power supply proper operation when installed in a system or device, the hot-spots components operating temperature should not exceed the corresponding maximum limits shown in the table alongside.

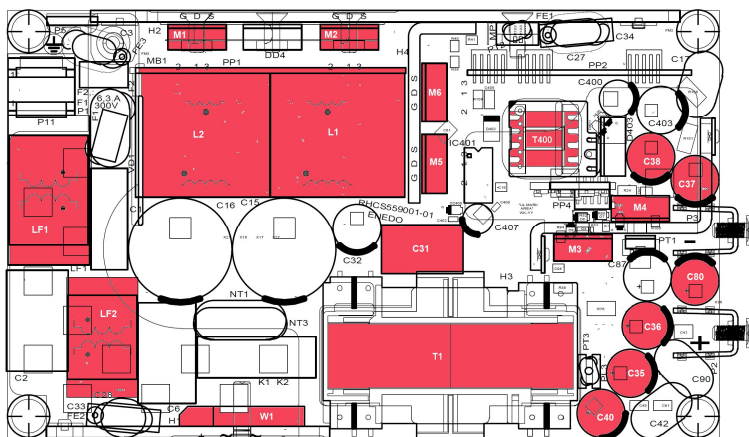


Hot Components PCB Reference	Maximum Operating Temperature [°C]
T1	130
T400	110
W1	125
LF1, LF2	120
L1, L2	120
M1, M2	120
M3, M4	120
M5, M6	120
C31	105
C35, C36, C40, C80	105
C37, C38	105

SIGNALS / CONTROLS


Signal	Notes	Min	Typ	Max	Unit
PS_ON	Active low, +5 V TTL signal compatible. Input low voltage	0	-	2.0	V
	Input high voltage (I _{IN} = 200 µA)	3.0	-	-	V
	V1 and V2 disabled when PS_ON is open				
P_OK	5V _{SB} not affected by PS_ON				
	V1 and V2 enabled with PS_ON connected to RTN				
	+5 V TTL compatible				
	Logic level low (<10 mA sinking)	-	-	0.7	V
	Logic level high (100µA sourcing)	2.4	-	5	V
5V _{SB} output	Low to high time after V1 in regulation	0.05	-	0.1	s
	Power down warning time	1	-	-	ms
	Active and in regulation after a 90<V _{AC} <264 is applied	-	-	200	ms
	5V _{SB} not affected by PS_ON				

SIGNALS TIMING

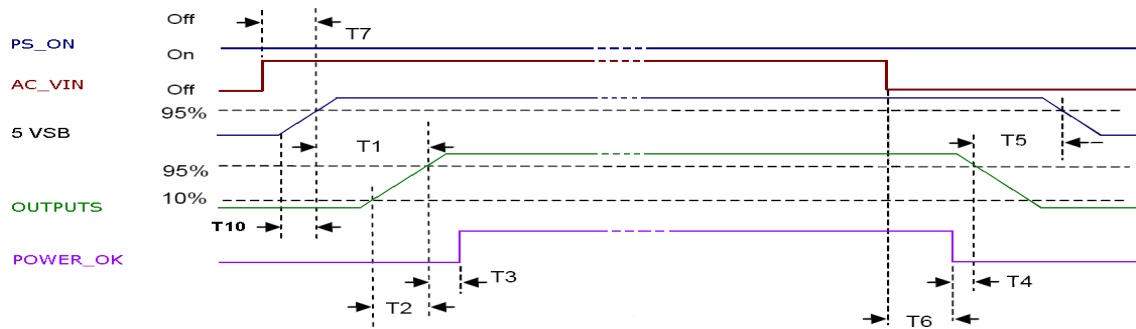

Above waveforms are expected with AC Input ON/OFF:

5 V _{SB} On – V1 On	50 ms ≤ T1 ≤ 250 ms
V1 Rise Time	5 ms ≤ T2 ≤ 85 ms
5 V _{SB} Rise Time	1 ms ≤ T10 ≤ 10 ms
V1 On – P_OK delay	30 ms ≤ T3 ≤ 100 ms
Power down warning ¹	T4 ≥ 5 ms
V1 Off – 5V _{SB} Off ²	T5 ≥ 1.2 s
AC Off – P_OK Low	T6 ≥ 10 ms (115/ 230 V _{AC})
AC_ON – 5V _{SB} turn On time	T7 ≤ 1000 ms

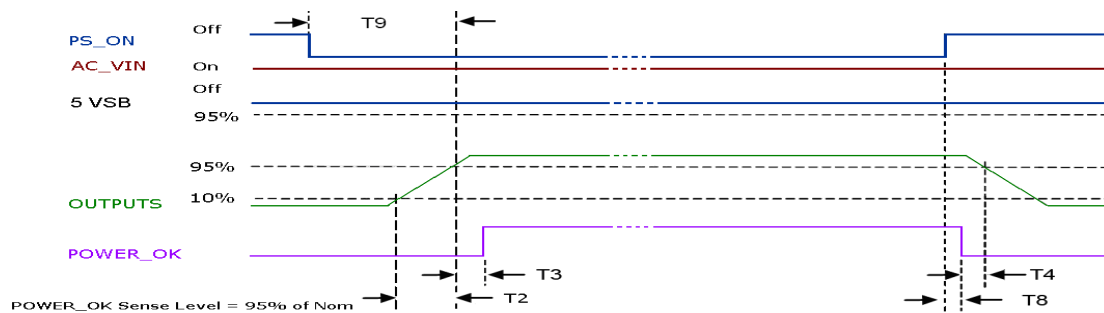

Above waveforms are expected with PS_ON Signal ON/OFF state change:

V1 Rise Time	5 ms ≤ T2 ≤ 85 ms
V1 On – P_OK delay	30 ms ≤ T3 ≤ 100 ms
Power down warning ¹	1 ms ≤ T4 ≤ 5 ms
-PS_ON – P_OK down	T8 ≤ 1 ms
-PS_ON – V1 On Timing	T9 ≤ 200 ms

¹ T4 parameter measurement setup will assume at least 10% of the maximum load on each output.

² T5 parameter measurement setup will assume at least 50% of the maximum load on main output.

PROTECTION FEATURES

Specification	Test Conditions / Notes	Min.	Nominal	Max.	Units
Input Under Voltage	Auto-recovering, hiccup mode.	58	65	75	V _{AC}
Input Fuse	8 A 300 V _{AC} Time Lag Radial Fuse T/H	-	-	8	A
Over Current	At nominal input voltages V1: Hiccup mode, auto-recovering 5V _{SB} : Hiccup mode, auto-recovering:	115	-	160	%I _{Rated}
Short Circuit	At nominal input voltages V1: Hiccup mode, auto-recovering. 5V _{SB} : Hiccup mode, auto-recovering.	-	-	-	
Over Voltage	V1, Power shut down, latch off. 5V _{SB} , Hiccup mode, auto-recovering.	110	-	145	%V _{NOM}
Over Temperature (on secondary and primary side)	Hiccup mode, auto-recovering.	-	-	-	°C
Isolation: Input-to-Output	Reinforced	6000	-	-	V _{DC}
Isolation: Input-to-Earth	Basic	4250	-	-	V _{AC}
		2545	-	-	V _{DC}
		1800	-	-	V _{AC}
Isolation: Output-to-Earth	Basic	Production tested at 2545 V _{DC}			
		2121	-	-	V _{DC}
		1500	-	-	V _{AC}

ENVIRONMENTAL SPECIFICATIONS

Specification	Test Conditions / Notes	Min	Nominal	Max	Units
Operating Temperature Range	Start up at -40 °C at <20% load. No de-rating up to 50°C at > 600LFM	-40	-	50	°C
Operating Temperature Range with De-rating	See de-rating curves and conditions in the Output Specifications section	-	-	70	°C
Storage Temperature		-40	-	85	°C
Humidity	RH, Non-condensing Operating. Non-operating	-	-	90	%
		-	-	95	%
Operating Altitude	Power de-rating above 1800 m	-	-	5000	m
Shock	EN 60068-2-27 Operating: Half sine, 30 g, 18 ms, 3 axes, 6x each (3 positive and 3 negative). Non-Operating: Half sine, 50 g, 11 ms, 3 axes, 6x each (3 positive and 3 negative).				
Vibration	EN 60068-2-64 Operating: Sine, 10 – 500 Hz, 1 g, 3 axes, 1 oct/min., 60 min. Random, 5 – 500 Hz, 0.02 g ² /Hz, 1 g _{RMS} , 3 axes, 30 min. Non-Operating: 5 – 500 Hz, 2.46 g _{RMS} (0.0122 g ² /Hz), 3 axes, 30 min.				
MTBF	Full Load, 40 °C ambient 80% Duty cycle, Telcordia SR-332 Issue 2	400.000	-	-	Hours
Useful Life	Worst nominal V _{IN} , 80% load, 40 °C ambient.	-	5	-	Years

ELECTROMAGNETIC COMPATIBILITY (EMC) – EMISSIONS

Phenomenon	Conditions / Notes	Standard	Equipment/Performance Class
Conducted	115, 230, 277 V _{RMS} . Maximum load.	EN 55011 (ISM) EN 55032 (ITE)	B
Radiated	At 10 m distance	EN 55011 (ISM) EN 55032 (ITE)	A ³
Line Voltage Fluctuation and Flicker	At 20%, 50% and 100% maximum load. Nominal input voltages	EN 61000-3-3	
Harmonic Current Emission	230 V _{AC} input voltage, 50 / 60 Hz	EN 61000-3-2	A
Emission	230 V _{AC} 50 / 60 Hz, >150 W load	EN 61000-3-2	C
	230 V _{AC} 50 / 60 Hz, >40 W load	EN 61000-3-2	D

³ Radiated emissions should be assessed at system level.

ELECTROMAGNETIC COMPATIBILITY (EMC) – IMMUNITY

Phenomenon	Conditions / Notes	Standard	Test Level	Criteria
	Reference standards for ITE	EN 55024		
	Reference standard for Industrial/IMS equipment	EN 61000-6-2		
ESD	15 kV air discharge, 8 kV contact, at any point of the system.	EN 61000-4-2	4	A
Radiated Field	10 V/m, 80-1000 MHz, 1 KHz, 80% AM.	EN 61000-4-3	3	A
Electric Fast Transient	±2 kV on AC power port for 1 minute	EN 61000-4-4	3	A
Surge	±2 kV line to line; ± 4 kV line to earth on AC power port	EN 61000-4-5	4	A
Conducted RF Immunity	10 V _{RMS} , 0,15-80 MHz, 1 kHz/2 Hz 80% AM	EN 61000-4-6	3	A
Dips and Interruptions	200 – 277 V _{AC} :			
	Drop-out to 0% for 10 ms	EN61000-4-11		A
	Dip to 40% for 5 cycles (100 ms)	EN61000-4-11		A
	Dip to 70% for 25 cycles (500 ms)	EN61000-4-11		A
	Drop-out to 0% for 5 s	EN61000-4-11		B
	100 – 127 V _{AC} :			
	Drop-out to 0% for 10 ms	EN 61000-4-11		A
	Dip to 40% for 5 cycles (100 ms)	EN 61000-4-11		B (derating TBD)
	Dip to 70% for 25 cycles (500 ms)	EN 61000-4-11		A (derating TBD)
	Drop-out to 0% for 5 s	EN 61000-4-11		B


SAFETY AGENCIES APPROVALS

Certification Body	Safety Standards and file numbers	Category
CSA/UL	UL 62368-1 CSA C22.2 No. 62368-1:19	Audio Video and Information Technology Equipment
IEC IECEE CB Certification	IEC/EN 62368-1	Audio Video and Information Technology Equipment
CE	Directive 2014/35/EU: Electrical Safety: Low Voltage electrical equipment (LVD) Directive 2014/30/EU: Electromagnetic Compatibility (EMC) Directive 2015/863/EU: RoHS 3	Audio Video and Information Technology Equipment
Designed to meet IEC/EN/UL/CSA 61010-1 2 nd edition and UL8750		

OUTLINE DRAWING AND CONNECTIONS – OPEN FRAME CHASSIS (-OF)

Overall dimensions: 76.2 x 127.0 x 38.5 mm (3.00 x 5.00 x 1.51 in)

Weight: 400 g (0.88 lb)



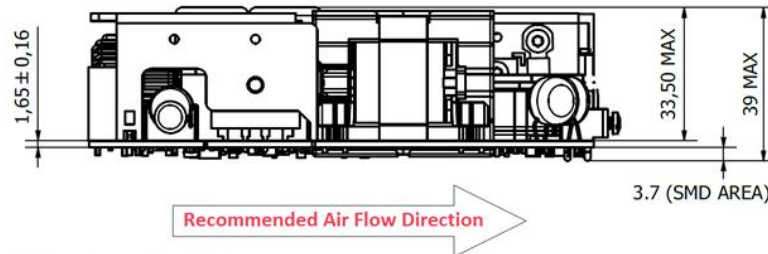


P14: I/O Signal connector
CJT A1501WR-S-8P-G
or equivalent

P1: AC Input connector
J.S.T. p/n B2P3-VH(LF)(SN)

P5: Protection Earth (PE)
Faston 6.3 OSTERRATH E1536


P2-P3: DC Output connectors
#2 M4 PCB screw terminals
tight to 0.8-1.0 Nm

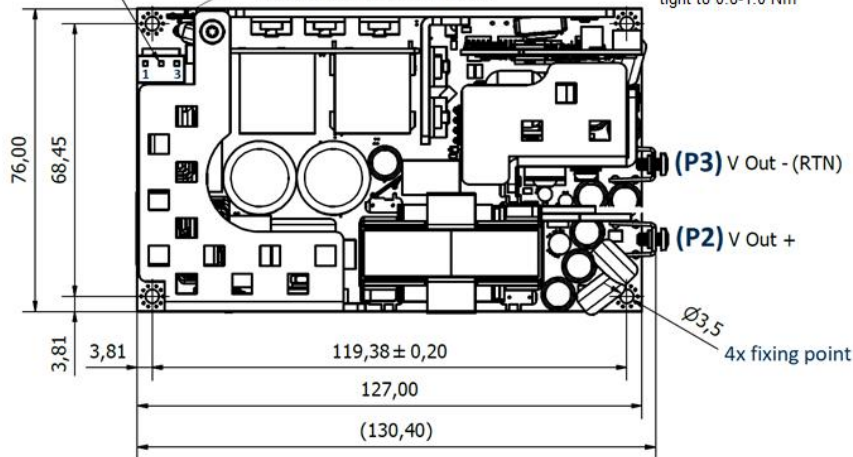

Signals Connector – P14																			
<p>CJT A1501WR-S-8P-G (or equivalent), mates with: CJT A1501H-8P (<i>housing</i>) CJT A1501-GP (<i>terminals</i>) or equivalent.</p>	<table border="1"> <thead> <tr> <th>Pin Ref.</th> <th>Function</th> </tr> </thead> <tbody> <tr> <td>8</td> <td>RS-</td> </tr> <tr> <td>7</td> <td>RS+</td> </tr> <tr> <td>6</td> <td>P_OK</td> </tr> <tr> <td>5</td> <td>-PS_On</td> </tr> <tr> <td>4</td> <td>RTN</td> </tr> <tr> <td>3</td> <td>RTN</td> </tr> <tr> <td>2</td> <td>+5V_{SB}</td> </tr> <tr> <td>1</td> <td>+5V_{SB}</td> </tr> </tbody> </table>	Pin Ref.	Function	8	RS-	7	RS+	6	P_OK	5	-PS_On	4	RTN	3	RTN	2	+5V _{SB}	1	+5V _{SB}
	Pin Ref.	Function																	
	8	RS-																	
	7	RS+																	
	6	P_OK																	
	5	-PS_On																	
	4	RTN																	
	3	RTN																	
2	+5V _{SB}																		
1	+5V _{SB}																		

AC Input Connector – P1									
<p>JST B2P3-VH(LF)(SN) Mates with JST NVAR-02VS (<i>housing</i>) JST SVT-41T-P1.1 (<i>terminal</i>) Use 16 AWG minimum wires</p>	<table border="1"> <thead> <tr> <th>P1 Pin Ref.</th> <th>Function</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>L1</td> </tr> <tr> <td>2</td> <td>NP</td> </tr> <tr> <td>3</td> <td>L2</td> </tr> </tbody> </table> <p>P5: Protection Earth (PE)</p>	P1 Pin Ref.	Function	1	L1	2	NP	3	L2
P1 Pin Ref.	Function								
1	L1								
2	NP								
3	L2								
DC Output Connector – P2, P3									
<p>2x M4 screw terminals KEYSTONE 7792 (tight to 0.8-1.0 Nm) Max deep screws 7 mm</p>	<table border="1"> <thead> <tr> <th>Pin Ref.</th> <th>Function</th> </tr> </thead> <tbody> <tr> <td>P2</td> <td>+V1</td> </tr> <tr> <td>P3</td> <td>RTN</td> </tr> </tbody> </table>	Pin Ref.	Function	P2	+V1	P3	RTN		
Pin Ref.	Function								
P2	+V1								
P3	RTN								

OUTLINE DRAWING AND CONNECTIONS – PROTECTIVE CAGE (-PC)

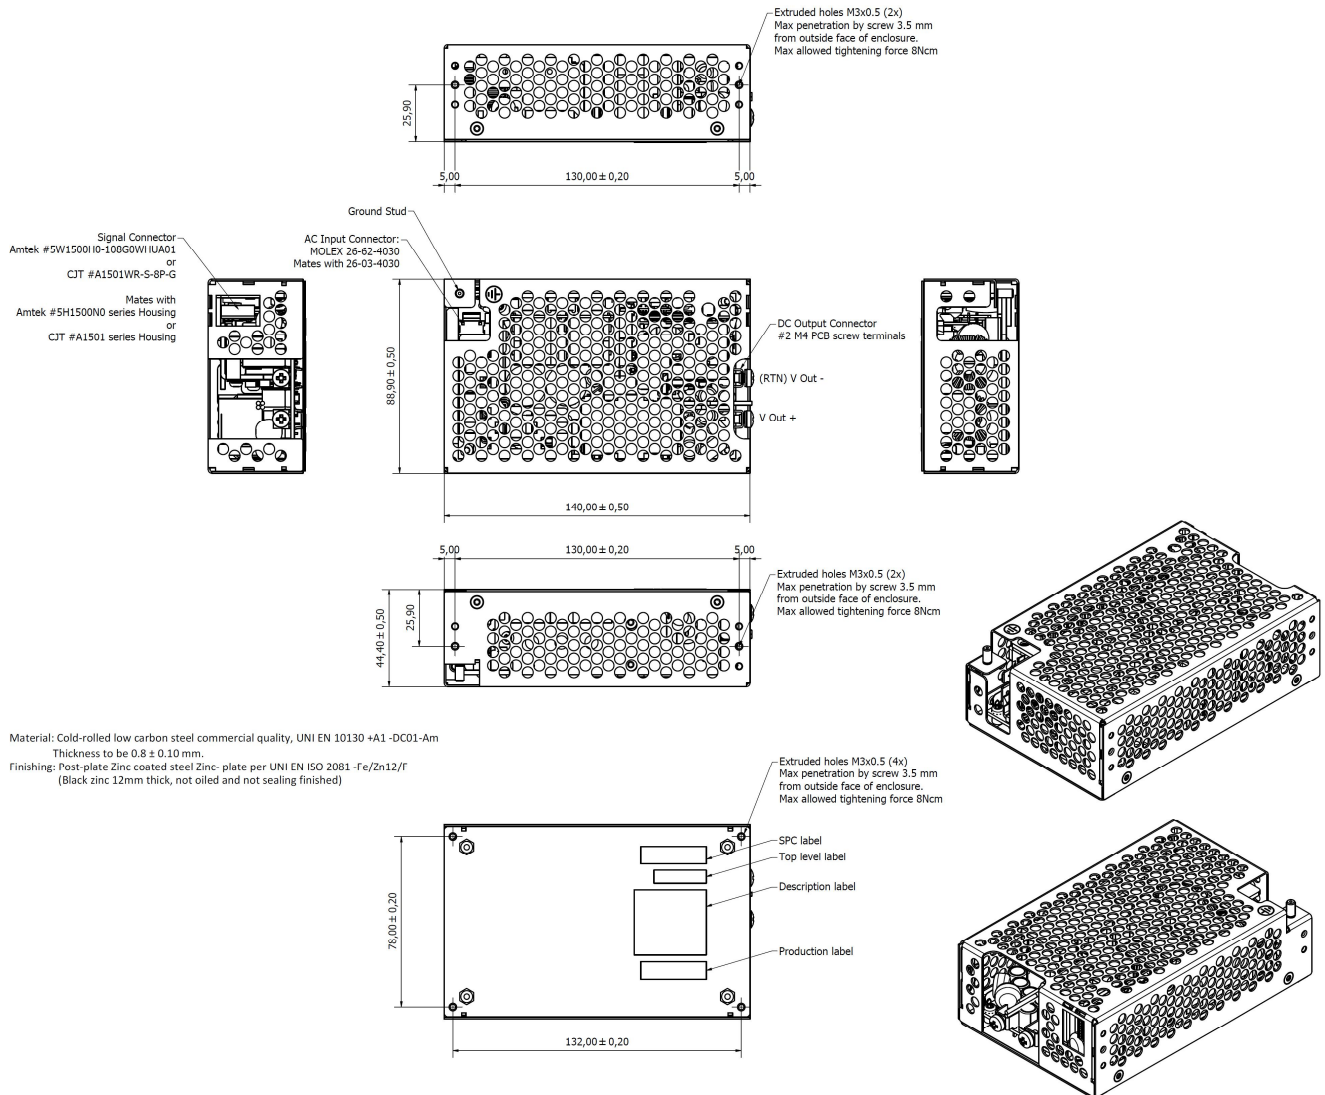

Specifications appearing in ENEDO's catalogues and brochures as well as any oral statements are not binding. All descriptions, drawings and other particulars (including dimensions, materials and performance data) given by ENEDO are as accurate as possible but, being given for general information, and are not binding on ENEDO. ENEDO makes thus no representation or warranty as to the accuracy of such material. We assume no liability other than as agreed in the terms of the individual contracts and we reserve the right to make technical modifications in the course of our product development. Our product information solely describes our goods and services and is in no way to be construed or interpreted as a quality or condition guarantee. The aforesaid shall not relieve the customer of its obligation to verify the suitability of our Products for the use or application intended by the purchaser. Customers are responsible for their products and applications. ENEDO assumes no liability from the use of its products outside of specifications. No license is granted to any intellectual property rights by this document.

REVISION HISTORY

Rev.	Date	Originator	
00	February 1 st , 2019	M. Petritoli	First release – Derived from DS_MDP460 Series_Rev02, Aug 2021
01	February 2 nd , 2024	M. Petritoli	<ul style="list-style-type: none"> · Output power derating curve relevant protective cage package variant added. · 520 W peak power capability added
02	April 9 th , 2024	M. Petritoli	<ul style="list-style-type: none"> · Removed 440 Hz operation condition · Removed VDC input operating condition
			·
			·
			·